


D

C

B

A

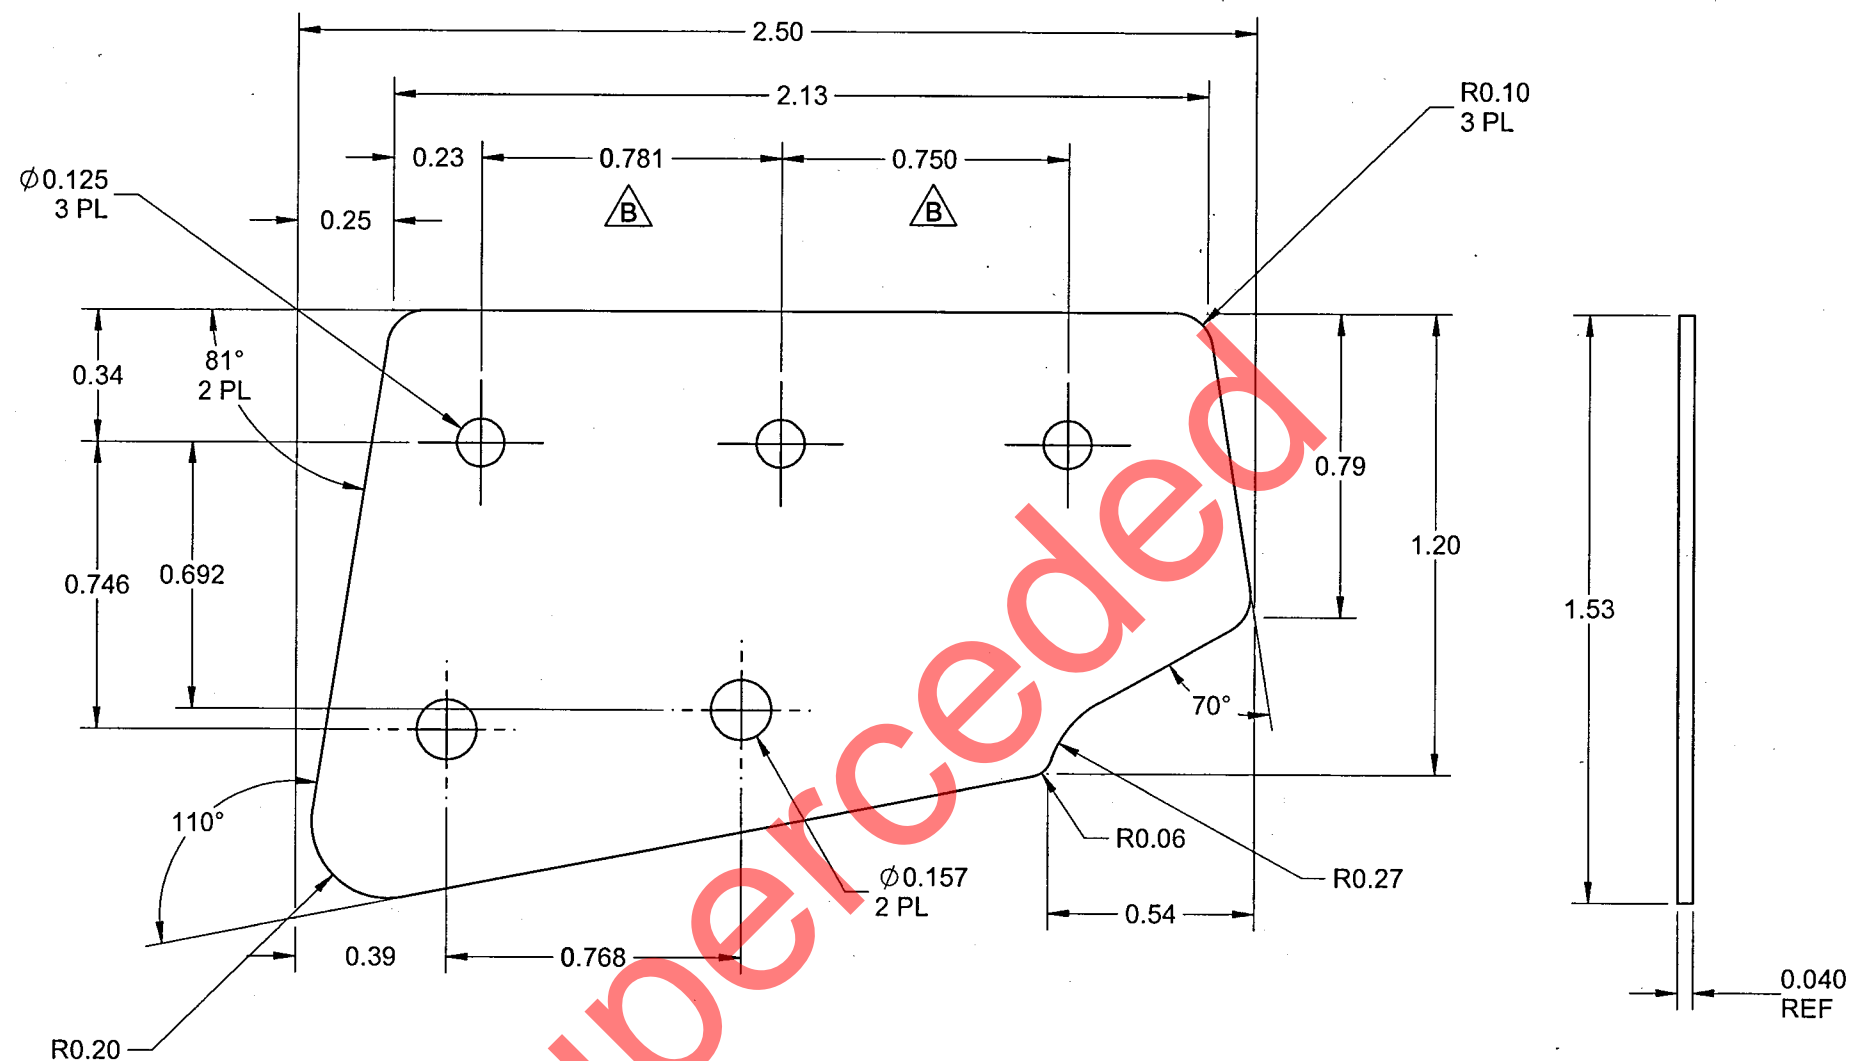

D5392-1 DOUBLER

RELEASED

2016 NOV 02
ECN 16-513

NOTES:

- 1) MATERIAL: 6061-T6/T62 ALUMINUM SHEET, 0.040" THK
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027
OR ASTM B209
REF DART SPEC M6061T6S.040
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
- 7) WEIGHT: N/A lbs

APPROVED

B	REVISED HOLE SPACING	VS	16.03.21
A	NEW ISSUE	VS	16.01.22
REV.	DESCRIPTION	BY	DATE
DESIGN	VS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	VS		
CHECKED	RF	DRAWING NO.	REV. B
MFG. APPR.	DD	D5392	SHEET 1 OF 1
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	DOUBLER	NTS
DATE	16.03.21	COPYRIGHT © 2016 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	